

20 & 30 VA Transformer

HCT Series



Specifications

Wire Size

All leads are 18 AWG stranded
2/64" insulation thickness

Quick Connect Size

Standard male quick connect terminals
are .250" x .032"

Optional .187" x .020" available

Frequency

50/60 Hz

Insulation System

130°C Class B

Transformers change one AC voltage to another by magnetic induction. Hartland Controls produces transformers with primary and secondary voltage up to 250 VA. Our heavy-duty transformers are used in a variety of applications, including HVAC, water pumps, pool and spa, food service and electronics. We carry extensive domestic inventory to meet delivery schedules.

Features

- UL/CUL recognized 5085—File No. E223730, Class 2, 3 or File No. E243953, General Purpose
- Multiple mounting and termination options available, contact us for more information.

We can custom engineer a solution
to meet any need. Just ask.

815.626.5170 | HartlandControls.com

20 & 30 VA Transformer

HCT Series

Primary Lead Features

Voltage	Common	120	208	240	277	480	575
Color	Black	White	Red	Orange	Brown	Black/Red	Grey
Lead Length	12"	12"	12"	12"	12"	12"	12"
Strip Length	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"


Secondary Lead Features

Voltage	Common	24
Color	Blue	Yellow
Lead Length	12"	12"
Strip Length	1/2"	1/2"

Dimensions (inches [mm])

Quick Connect Models

	20 VA	30 VA
A DIM	2.26	2.67
B DIM	0.625	1.00

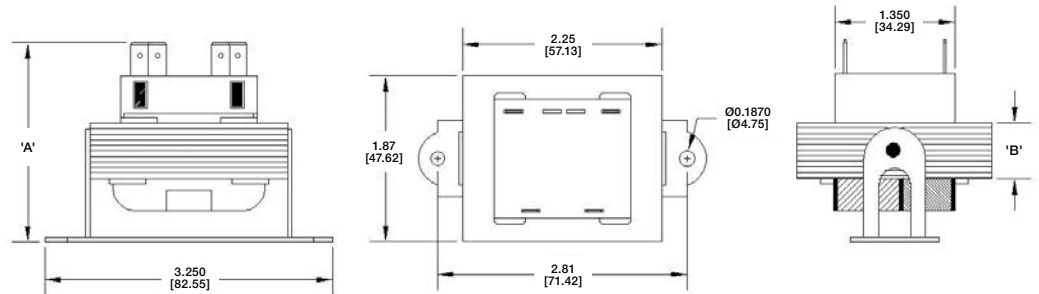

Multiple mounting and termination options available, contact us for more information.