

20 & 30 VA Transformer

HCT Series



Specifications

Wire Size

All leads are 18 AWG stranded
2/64" insulation thickness

Quick Connect Size

Standard male quick connect terminals
are .250" x .032"

Optional .187" x .020" available

Frequency

50/60 Hz

Insulation System

130°C Class B

Transformers change one AC voltage to another by magnetic induction. Hartland Controls produces transformers with primary and secondary voltage up to 250 VA. Our heavy-duty transformers are used in a variety of applications, including HVAC, water pumps, pool and spa, food service and electronics. We carry extensive domestic inventory to meet delivery schedules.

Features

- UL/CUL recognized 5085—File No. E223730, Class 2, 3 or File No. E243953, General Purpose
- Multiple mounting and termination options available, contact us for more information.

We can custom engineer a solution
to meet any need. Just ask.

815.626.5170 | HartlandControls.com

20 & 30 VA Transformer

HCT Series

Primary Lead Features

| Voltage | Common | 120 | 208 | 240 | 277 | 480 | 575 |
|--------------|--------|-------|------|--------|-------|-----------|------|
| Color | Black | White | Red | Orange | Brown | Black/Red | Grey |
| Lead Length | 12" | 12" | 12" | 12" | 12" | 12" | 12" |
| Strip Length | 1/2" | 1/2" | 1/2" | 1/2" | 1/2" | 1/2" | 1/2" |


Secondary Lead Features

| Voltage | Common | 24 |
|--------------|--------|--------|
| Color | Blue | Yellow |
| Lead Length | 12" | 12" |
| Strip Length | 1/2" | 1/2" |

Dimensions (inches [mm])

Quick Connect Models

| | 20 VA | 30 VA |
|-------|-------|-------|
| A DIM | 2.26 | 2.67 |
| B DIM | 0.625 | 1.00 |

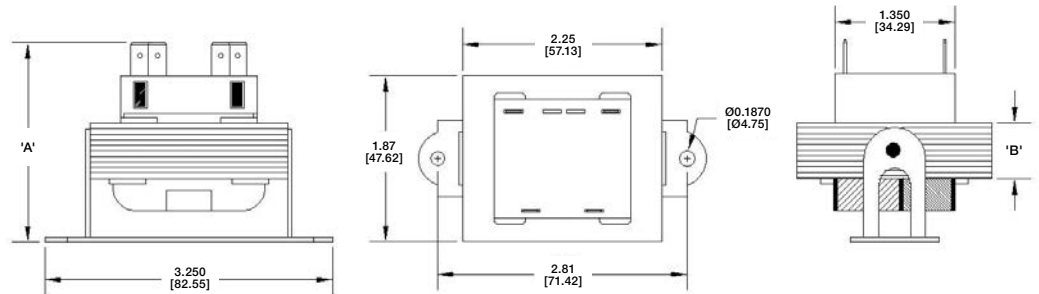

Multiple mounting and termination options available, contact us for more information.