


HCR-6 Series

SPNO, SPDT, DPNO, & DPDT General Purpose Switching Relay

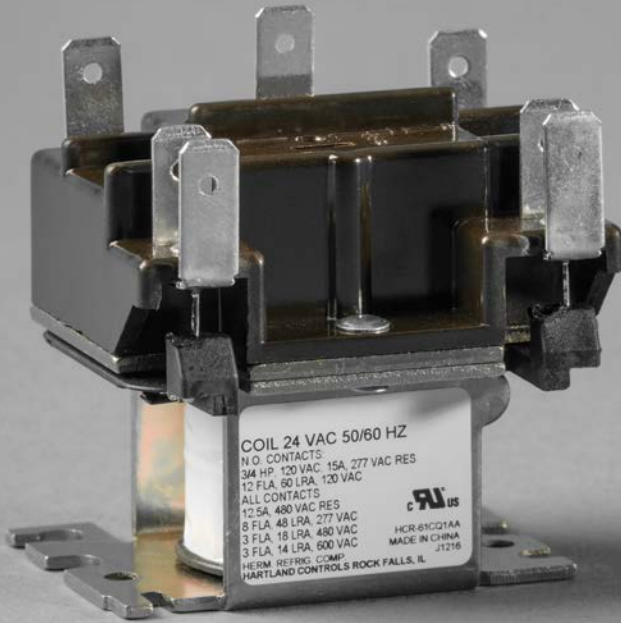

Relays control circuits through a low-power signal. An electro-magnetic current actuates the relay, creating a closed circuit within the device. General purpose relays are used in applications including HVAC systems, standby power supplies and telephone exchanges. We carry extensive domestic inventory to meet delivery schedules.

Features

- SPNO, SPDT, DPNO & DPDT switching configurations
- Class B insulation system
- .250" QC terminals
- Multi-positional mounting
- UL 508 File No. E227250

We can custom engineer a solution to meet any need. Just ask.

815.626.5170 | HartlandControls.com

Specifications

Arrangement

SPST-NO, SPST-NC, SPDT, DPST-NO, DPST-NC, DPDT

Contact Material

Silver Cadmium Oxide Alloy

Power Rating

3/4 HP 125/250 VAC
12 FLA 60 LRA 15 A Res. @ 125 VAC
6 FLA 35 LRA 15A Res. @ 250/277 VAC

VAC

3 FLA 18 LRA 12.5A Res. @ 480 VAC
3 FLA 14 LRA 600 VAC

Pilot Duty Rating

1/10 HP 125/250 VAC
125 VA @ 125/250/480 VAC
3 Amp 277 VAC

Temperature Range

-40°C to +65°C

Unit Weight

6.08 oz

Power Pole Terminations

.250" QC

Coil Termination

.250" QC

Mechanical Life Expectancy

1 million operations

Electrical Life Expectancy

250,000 operations—resistive
100,000 operations—inductive

Nominal Coil Power

AC 9.5 VA

Dimensions (inches [mm])

